

## Té égal à 90° COOL-FIT 2.0



A




B


### Exécution:

- PE100 SDR11 pré isolé, métrique
- Isolation en mousse GF HE
- Résistant aux impacts Couleur: noir
- A: Raccord électrosoudable avec lèvre d'étanchéité intégrée pour un assemblage étanche à l'eau et à la vapeur
- B: Raccord à bout lisse

d/D (mm)	PN (bar)	Code	Poids (kg)	L (mm)	L1 (mm)	z (mm)	z1 (mm)	Pouce (inch)	Type
32/75	16	<b>738 204 108</b>	0.154	73	36	18	98	1	A
40/90	16	<b>738 204 109</b>	0.230	81	40	22	112	1 ¼	A
50/90	16	<b>738 204 110</b>	0.306	88	44	25	125	1 ½	A
63/110	16	<b>738 204 111</b>	0.492	97	48	30	147	2	A
75/125	16	<b>738 204 112</b>	0.673	110	55	36	140	2 ½	A
90/140	16	<b>738 204 113</b>	1.022	124	62	43	161	3	A
110/160	16	<b>738 204 114</b>	1.751	148	72	57	184	4	A
140/200	16	<b>738 204 116</b>	3.317		84	198	193	5	B



A

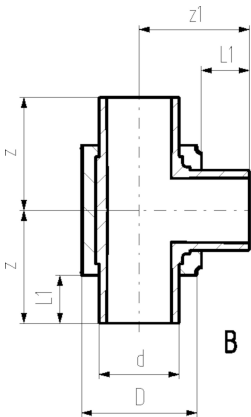

B

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: [info.ps@georgfischer.com](mailto:info.ps@georgfischer.com)

Internet: <http://www.gfps.com>